


1 2 3 4 5 6

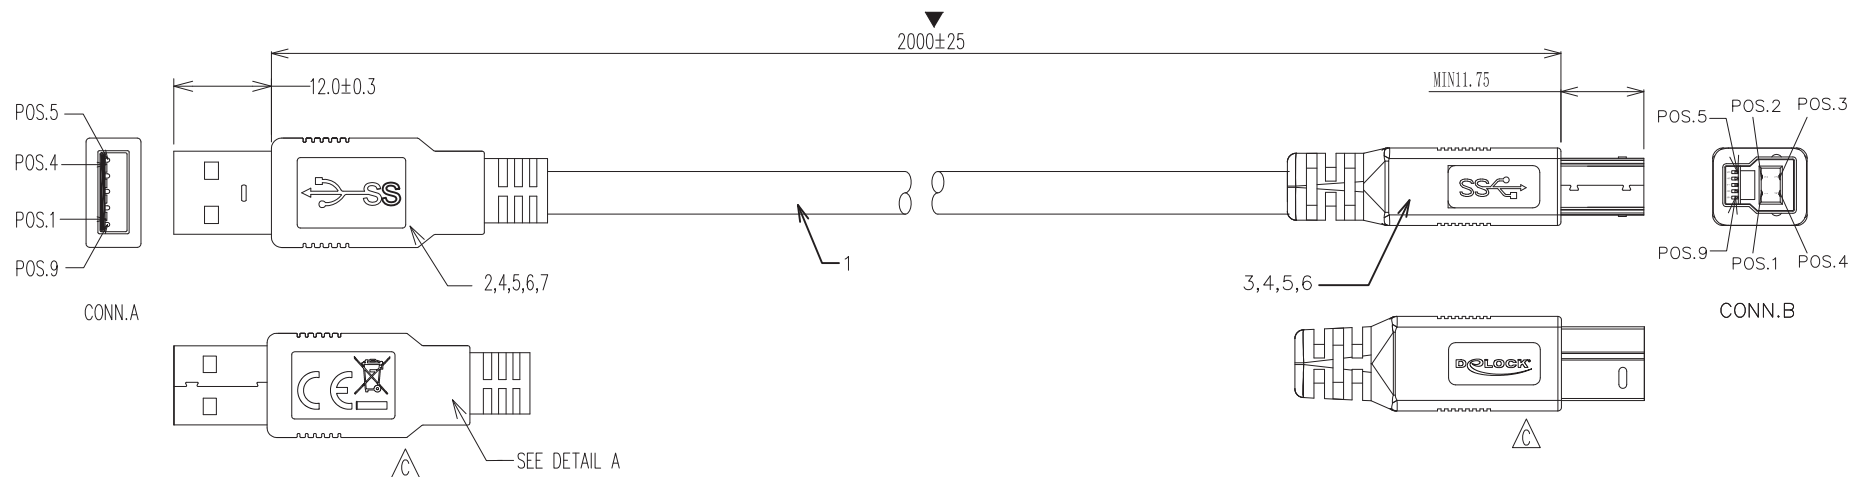


PIN ASSIGNMENT			
CONN.A	Signal Name	CONN.B	COLOR
1	VBUS	1	RED
2	D-	2	WHITE
3	D+	3	GREEN
4	GND	4	BLACK
5	StdA_SSRX-	5	BLUE
6	StdA_SSRX+	6	YELLOW
7	<GND Drain 1 / GND Drain 2>	7	DRAIN
8	StdA_SSTX-	8	PURPLE
9	StdA_SSTX+	9	ORANGE
SHELL	Shield	SHELL	BRAID+DRAIN


ELECTRONIC TEST:

- 1.ALL CABLE 100% TEST,OPEN ,SHORT,MISS WIRE
- 2.RESISTANCE:2 ohm Max
- 3.I.RESISTANCE:10M ohm Min
- 4.HI-POT:300V DC/10ms
- 5.DIMENSIONS MARK "▼"SHOULD BE CHECKED;

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
7	Mylar	耐高温麦拉 W9*T0.06mm 透明棕色	A/R	pcs
6	TUBE	TUBE BLACK Ø1.5	A/R	pcs
5	COPPER FOIL	COPPER FOIL W=5.0MM	A/R	pcs
4	OVER MOLDING	45P PVC BLUE	A/R	KG
3	CONN B.	USB BM 3.0 INSULATION BLACK SHELL NICKEL PLATED G/F	1	SET
2	CONN A.	USB AM 3.0 INSULATION BLUE SHELL NICKEL PLATED G/F	1	SET
1	CABLE	USB3.0 CABLE UL20276 (28AWG1P*AE)*2P+(28AWG*1P)+24AWG*2C+FA2EB COLOR: BLUE(表面) OD: 5.5mm	A/R	M



we move the world

Date		2019 / 08 / 29		Title: Cable USB 3.0 Type-A male > Type-B male 2 m blue	
Unit	mm	Item no.	82434		
Projection		Barcode	4043619824342		
Rev	A	File No.	88229		

1 2 3 4 5 6